



baja designs
The Scientists of Lighting

2018 Can-Am X3/Rock Crawler Roof Mount Kit



2950 Norman Strasse Rd • San Marcos • CA • 92069

Phone 760-560-2252 • Fax 760-560-0383

info@bajadesigns.com • www.bajadesigns.com



baja designs[®]
The Scientists of Lighting

LIMITED LIFETIME WARRANTY

Baja Designs proudly offers a LIFETIME WARRANTY against manufacturer's defect on all the products that we manufacture.

These are comprehensive warranties; other than the exclusions below – you're covered. If your LED or HID bulb burns out, you're covered. Additionally, cutting off our connector or changing your lenses does not automatically void your warranty.

Exclusions:

Installation errors, abuse, misuse or crash damage. You must be the original owner of the product and can supply proof of purchase.

Baja Designs manufactures its own products as well as resells products manufactured by others. Baja Designs makes no express or implied warranties on products not manufactured by Baja Designs including without limitation any warranties or merchantability and fitness for a purpose. We will however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties.

Baja Designs will pay the freight if your product is less than 90 days old, otherwise defective products must be returned to Baja Designs, Inc., freight prepaid. At our option, we will repair or replace items in question and return them at no charge. If the identical product is no longer available, we will replace with a similar product of equal value. Baja Designs Inc. will not be responsible for any indirect or consequential damages in connection with defective merchandise. Items purchased through a Baja Designs authorized dealer must be returned through the dealer. Only available on LED auxiliary lights and product must be in sellable condition at MSRP. Product that has been damaged in any way after the original purchase date will be excluded from this guarantee.

Indemnification:

Buyer hereby acknowledges off-roading, racing and driving at night are dangerous activities and that the products and/or supplies purchased from Baja Designs are used in an inherently dangerous activity that may endanger life and limb; and in no event shall the seller, or seller's heirs and assigns, be held liable for consequential damages, nor shall seller's liability on any claim for damages arising out of or connected with the sale, delivery, or use of purchased products and/or supplies exceed the purchase price of the products and/or supplies.


Buyer is responsible for ensuring that it uses the products (and its vehicle) in accordance with all applicable laws, regulations, guidelines, and standards of care. Buyer acknowledges that some products may only be used when off-roading, and Buyer will comply with all vehicle and road safety guidelines. Buyer is solely responsible for (and will indemnify and hold Bestop harmless for) any claims, losses, damages, fines, fees, costs, or other amounts arising out of Buyer's non-compliance with these provisions.



baja designs®
The Scientists of Lighting

Step 1: With the provided bracket hardware place a washer onto each bolt, insert bolts and washers into the brackets then install driver and passenger side brackets onto the roll cage using the last washers and four nylon nuts.


Note: Keep brackets loosely attached to roll cage until the light is mounted.

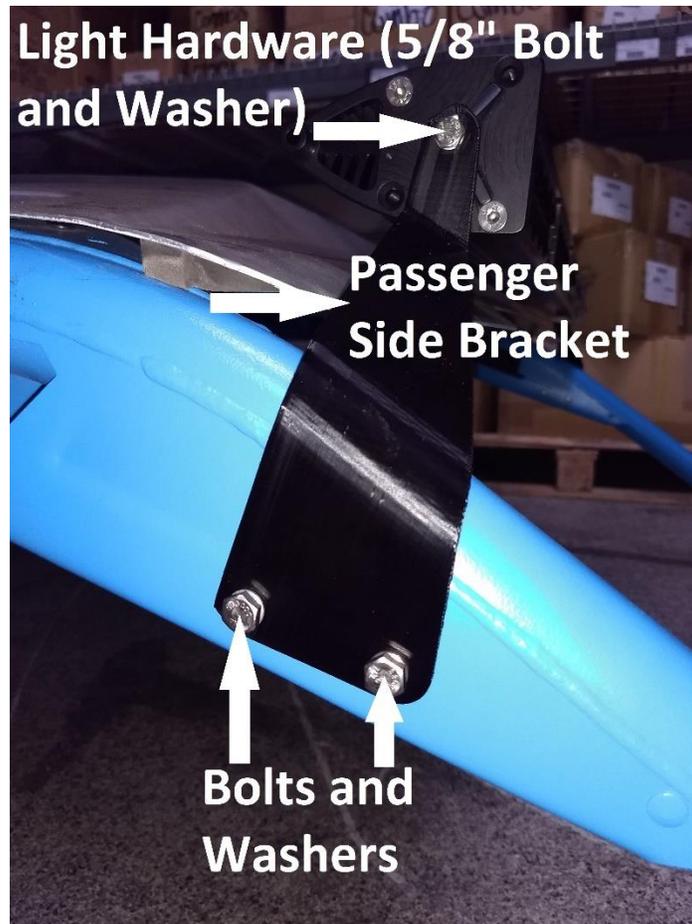



baja designs
The Scientists of Lighting

Step 2: Install the light onto the brackets with the hardware included in the light's box.

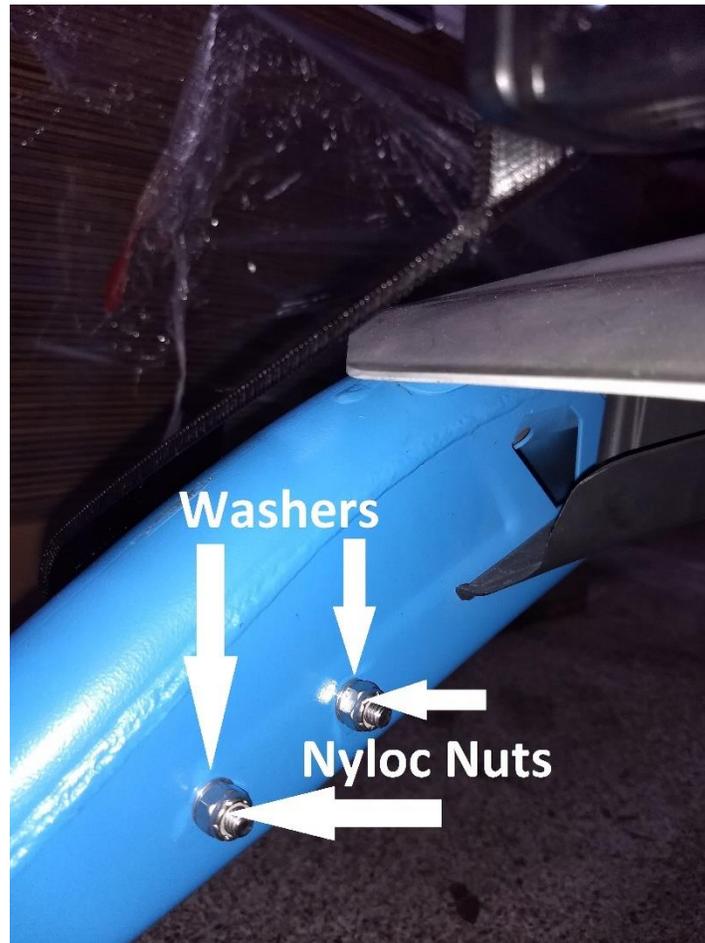

Step 3: Fully tighten all bolts and adjust light.



baja designs
The Scientists of Lighting

Wiring Guide



1. Use the provided harness to connect to the light bar.
2. Determine a desired dash location for the toggle switch. Using a $\frac{3}{4}$ " stepped drill bit, drill a hole. Be mindful of what is behind the dash and remove dash if necessary.
3. Take a quick picture of the switch terminals for reference later. Remove the switch terminals from the switch, run the harness through the firewall and through the desired dash location. Reattach the toggle switch and press into the dash.
4. Connect the +12V (red wire) to the positive on the Bus Bar under the hood, not the accessory power port. Connect the ground (black wire) to the Bus Bars ground.