



baja designs.
The Scientists of Lighting

1999-2010 Ford Super duty Fog Pocket Kit Instructions (63-0806)



185 Bosstick Boulevard • San Marcos • CA • 92069

Phone 760-560-2252 • Fax 760-560-0383

info@bajadesigns.com • www.bajadesigns.com



LIMITED LIFETIME WARRANTY

Baja Designs proudly offers a LIFETIME WARRANTY against manufacturer's defect on all the products that we manufacture.

These are comprehensive warranties; other than the exclusions below – you're covered. If your LED or HID bulb burns out, you're covered. Additionally, cutting off our connector or changing your lenses does not automatically void your warranty.

Exclusions:

Installation errors, abuse, misuse or crash damage. You must be the original owner of the product and can supply proof of purchase.

Baja Designs manufactures its own products as well as resells products manufactured by others. Baja Designs makes no express or implied warranties on products not manufactured by Baja Designs including without limitation any warranties or merchantability and fitness for a purpose. We will however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties.

Baja Designs will pay the freight if your product is less than 90 days old, otherwise defective products must be returned to Baja Designs, Inc., freight prepaid. At our option, we will repair or replace items in question and return them at no charge. If the identical product is no longer available, we will replace with a similar product of equal value. Baja Designs Inc. will not be responsible for any indirect or consequential damages in connection with defective merchandise.

Items purchased through a Baja Designs authorized dealer must be returned through the dealer. Only available on LED auxiliary lights and product must be in sellable condition at MSRP. Product that has been damaged in any way after the original purchase date will be excluded from this guarantee.

Indemnification:

Buyer hereby acknowledges off-roading, racing and driving at night are dangerous activities and that the products and/or supplies purchased from Baja Designs are used in an inherently dangerous activity that may endanger life and limb; and in no event shall the seller, or seller's heirs and assigns, be held liable for consequential damages, nor shall seller's liability on any claim for damages arising out of or connected with the sale, delivery, or use of purchased products and/or supplies exceed the purchase price of the products and/or supplies.



baja designs.
The Scientists of Lighting

1999-2010 Ford, Super Duty Fog Pocket Kit Instructions

Special Note:

This kit works with three variants of the Super Duty series (99-04), (05-07), (08-10). The first instructions will cover the (99-04) and (05-07) models. The (08-10) instructions will follow.


1999-2007 Ford, Super Duty Fog Pocket Kit Instructions

Tools Required

- 10mm wrench
 - 10mm socket wrench
 - 7/16" wrench
 - 7/16" socket wrench
 - 8mm socket wrench
 - 13mm Socket wrench
 - 4mm Allen wrench
 - Phillip's head and standard screwdriver
1. To begin, open the hood and remove the four Phillip's head screws at the top of the grille (circled below). Support the grille from tipping forward. Removal of the grille will provide easy access to the top two bolts of each fog light assembly.




2. With a standard screwdriver (flathead), pry up on the four clips that hold the bottom of the grille on the vehicle. To access the clips, place the standard screwdriver in between the top surface of the bumper and under the grille. The photo below shows the location of the clips. The next photo shows the clip.

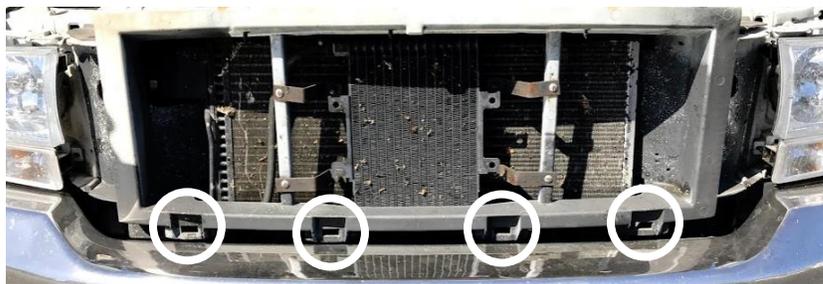



3. Now that the top two fasteners of each OEM fog light assembly are exposed, the bottom bolt on each will need to be addressed. These bolts can be found underneath the vehicle on the backside of the front bumper. There is a small rubber flap that can be pushed away to access the bolts. If needed, use a standard screwdriver to pry up the plastic fasteners holding the flap to the bumper. Below is an image of the OEM fog light bracket for reference.

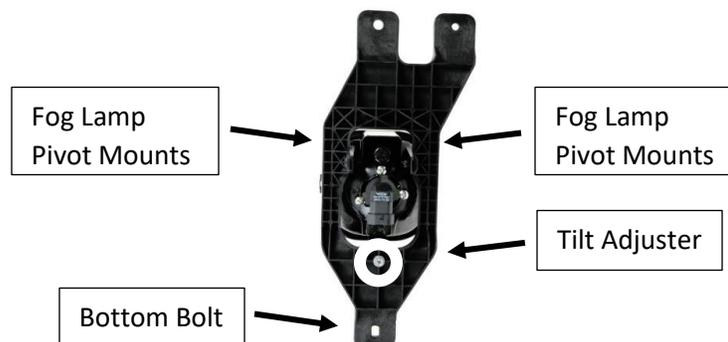


4. In order to remove the assembly from the bumper, the light will have to be removed from the bracket first. Using an 8mm socket wrench, remove the bolts from step 3. While still inside the bumper, the fog light assembly will have to be flipped around to expose the backside of the light. Using an 8mm wrench (or Phillip's head), remove the tilt adjuster bolt, spring, and plastic retaining nut. With the standard screwdriver, pry the fog lamp pivot mount plastic fasteners from the assembly to detach fog lamp. The now disassembled fog light can be removed from the bumper in two pieces. Repeat each step for the other assembly.



baja designs.
The Scientists of Lighting

5. Set the OEM fog lamps aside and keep the plastic OEM brackets for the new assemblies. Locate the stainless-steel Super duty brackets and the Squadron parts bags. With the 4mm Allen wrench, screw in the Squadron 6mm housing bolts through the washer, bracket, serrated washer, and then into the light housing. Repeat for the opposite side of the housing, then repeat for the other light. The exploded view below is for reference.

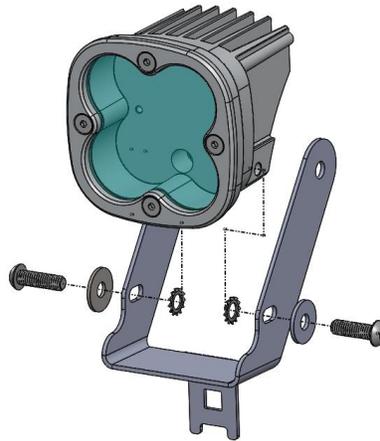

Special Note:

The two following photos have an enlarged bezel that is only for (11-16), which is not used for this kit.

6. Now it is time to mount the new light and bracket to the OEM plastic fog bracket. Using the 7/16" wrench and socket wrench, thread the 7/16" hex head bolt into the washer, plastic bracket pivot mount, steel bracket, washer, and nylon locking nut. Repeat for the adjacent fastener.

Note: the steel bracket goes on the inside of the OEM plastic bracket pivot mounts.





7. Reuse the OEM fog lamp bracket tilt adjustment hardware with the new bracket circled below.



8. Adjust the housing bolts and OEM tilt adjuster until the desired fitment is attained.
9. Repeat steps 6-8 for the opposite side of the vehicle.
10. The new complete fog light assemblies will fit through the bumper for installation. The pictures below show the orientation that allows the new completed assemblies to fit through the opening. Install the new fog lamp assemblies and brackets with the 8mm socket wrench and fasteners from step 3. Tighten.



11. Attach the plug 'n play adapter to the factory harness and the Squadron power cord. Repeat this step for the other side. Tie the wires away from any hot and/or rotating components.



baja designs.
The Scientists of Lighting

12. To re-install the grille, move it into position and push the bottom of the grille to snap the clips back into place. With the Philip's head screwdriver, replace the four screws at the top of the grille and tighten.

2008-2010 Ford, Super Duty Fog Pocket Kit Instructions

Tools Required

- 7/16" wrench
 - 7/16" socket wrench
 - 4mm Allen wrench
 - 8mm socket wrench
 - 13mm Socket wrench
1. To begin, locate the bracket at the front of the passenger side wheel well pictured below. With the 13mm socket wrench, remove the three bolts. Place the bracket aside. Repeat steps for the driver's side.






baja designs.
The Scientists of Lighting

2. Unplug the OEM fog light connector from the OEM harness. With the 8mm socket wrench, remove the three bolts holding on the fog light assembly circled below. Carefully remove the assembly from the vehicle. Repeat step for the driver's side.



3. Locate the stainless-steel Super Duty brackets and the Squadron parts bags. With the 4mm Allen wrench, screw in the Squadron 6mm housing bolts through the washer, bracket, serrated washer, and then into the light housing. Repeat step for the opposite side of the housing, then repeat for the other light. The exploded view below is for reference.

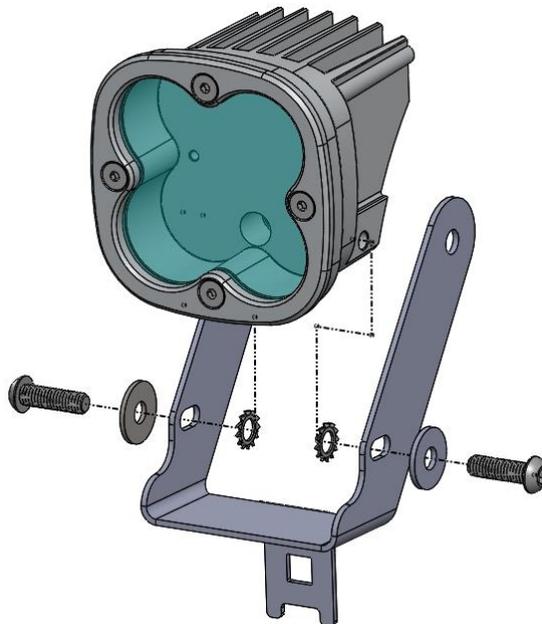



Special Note:

The two photos on this page have an enlarged bezel that is only for (11-16), which is not used for this kit.

4. Now it is time to mount the new light and bracket to the OEM plastic fog bracket. Using the 7/16" wrench and socket wrench, thread the 7/16" hex head bolt into the washer, plastic bracket pivot mount, steel bracket, washer, and nylon locking nut. Repeat for the adjacent fastener.

Note: the steel bracket goes on the inside of the OEM plastic bracket pivot mounts.



5. Reuse the OEM fog lamp bracket tilt adjustment hardware with the new bracket circled below.





6. Adjust the housing bolts and OEM tilt adjuster until desired fitment is attained.
7. Repeat steps 4-6 for the opposite side of the vehicle.
8. Install the new fog lamp assemblies and brackets with the 8mm socket wrench and fasteners from step 2.
9. Attach the plug 'n play adapter to the vehicle's factory harness and the Squadron power cord. Repeat step for the other side. Tie the wires away from any hot and/or rotating components.
10. Re-install the brackets from step 1 with the 13mm socket wrench.

Re-torque all the fasteners after 100 miles.

Your install is now complete! Thank you for choosing Baja Designs.